

Interconnecting Acoustic Doorset

Rw 55 dB - Fire Rated FD 30S

August 2007

Manufacturing specifications

Doorset 1 leaf - Club 39, Isaclub 39, Isa-DX 39

Frame

SAS 52 (Form HU14): hardwood with Huet acoustic seals

Doorleaf

Composition:

Club 39 (AC 04), Isaclub 39 (SB 03), IsaDX 39 (SC 01)

Width:

from 830 mm to 1230 mm

Height:

from 1420 mm to 2250 mm for Club 39

from 1420 mm to 2040 mm for Isaclub 39 and Isa-DX 39

Thickness:

41 mm

Devices

Ironmongery:

Double lip seal under the doorleaf

2 x 3no hinges 140 x 70 mm for a leaf width = 830 mm

2 x 4no hinges 140 x 70 mm for a leaf width > 830 mm

Lock:

1 or 3 points safety (without cylinder)

Mortice for electromagnetic lock

(lock and intumescent strips not supplied)

Fire Rated

FD 30S

Fire on both sides

CSTB 89 28726

CSTB 89 28725

CSTB 95 39697

Sound Reduction Rw

55

 dB

Rose: 52 dB (A)

CSTB 31638

Thermal Conductivity

1,9

 W/m².°C

CTBA 02/pc.cert/02/07

CTBA 02/pc.cert/02/03

Finishing

- Prime painted
- Wood veneering
- RAL 9010 Paint Finish
- Laminated

Options

- Built-in door closer
- Flat stainless steel threshold (Form DU22)
- Door covering (Form DU23)


Glazed vision panels

Clear Vision Dim.

- Rectangular 368 x 268 mm
- Circular diam 328 mm
- Half-circular 328 mm
- Diamond 318 mm
- Triangle 668 mm

Interconnecting Acoustic Doorset
Rw 55 dB - Fire Rated FD 30S

August 2007

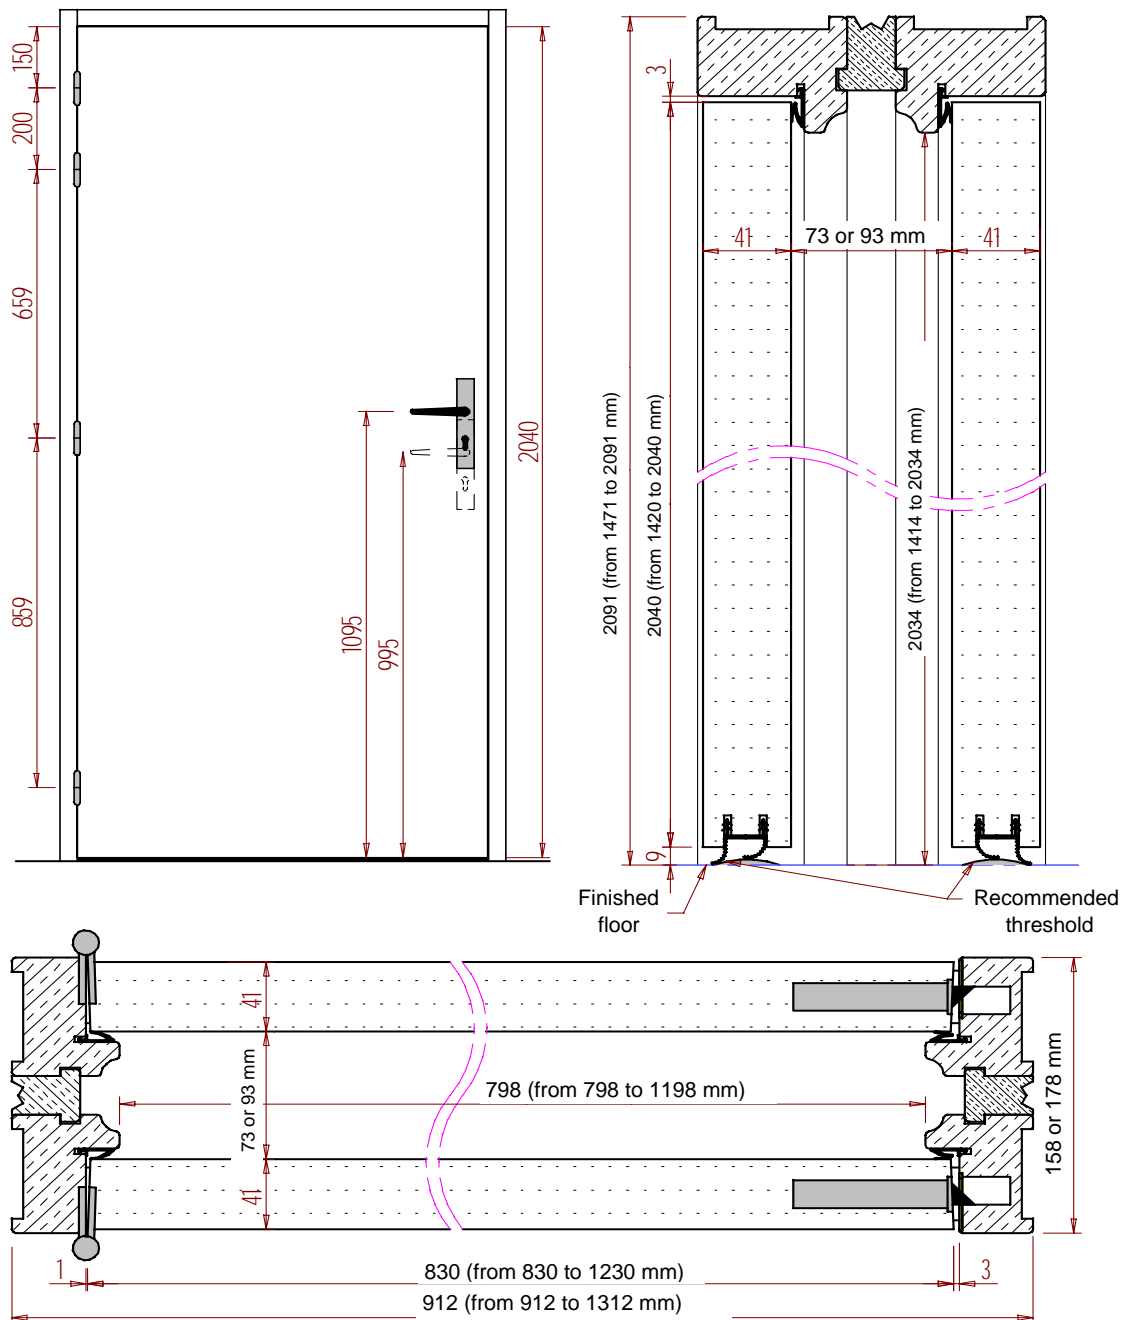


Interconnecting Acoustic Doorset
Rw 55 dB - Fire Rated FD 30S

August 2007

Acoustic Graph

f en HZ	R en dB
100	37
125	39
160	40
200	38
250	41
315	46
400	48
500	54
630	55
800	57
1000	59
1250	58
1600	57
2000	56
2500	56
3150	58
4000	54
5000	51

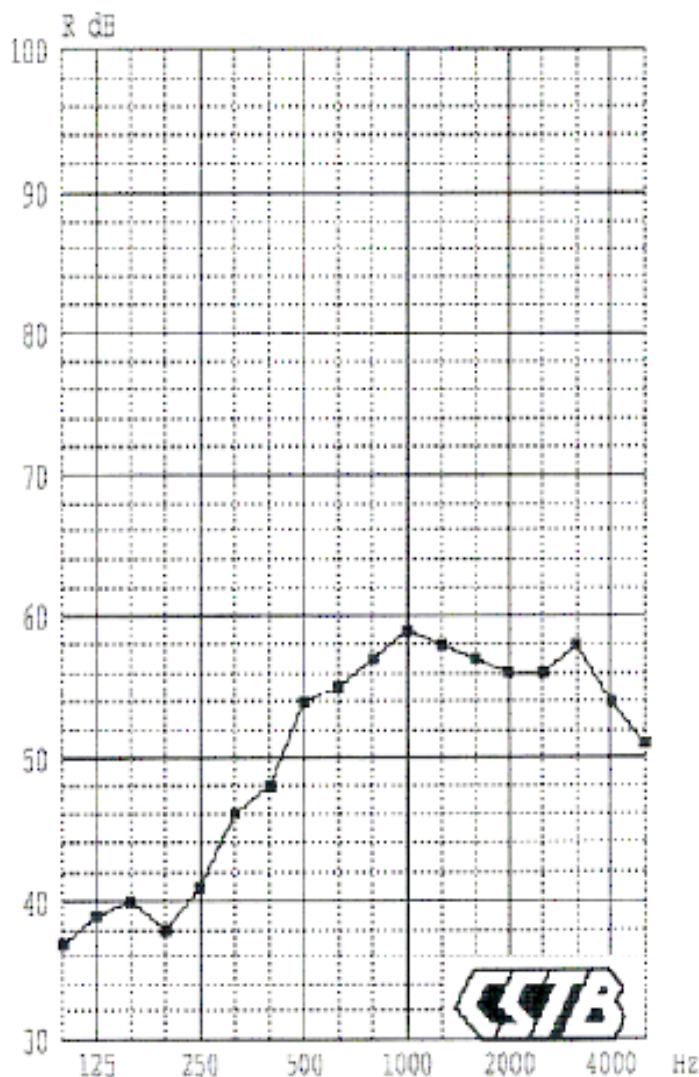

All rights reserved. Product specifications are subject to change without notice. Installation in accordance with manufacturers instructions.