


Datasheet Lochform R32D12V

VS_2023_1

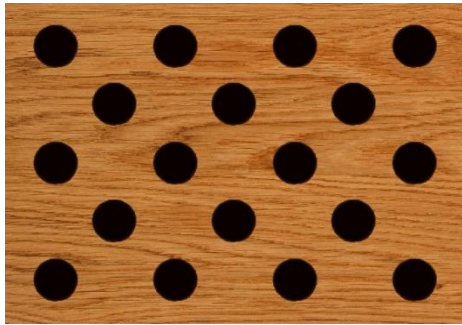

R = Grid in mm: 32,0mm
 D = Diameter in mm: 12,0mm shifted

Open surface: 22,08%

- Applicable for
- Ceiling
 - Wall
 - Cabinet door
 - Partitioning
 - Lay In

PRODUCT OPTIONS Acoustic boards from Trikustik are manufactured to order and in a wide range of variants.

Perforation: Front side: drilled (through hole)

Acoustic fleece: black, laminated on back side

Thickness: 15-19mm depending on material / other thicknesses possible on request

Edges: as Format Panel -> industrial cut

Options: unperforated friezes according to customer requirements

- Formats:** Paneel (variable)
- Materials:** MDF and many other materials
- Surfaces:** many options depending on material
- Fire Protection:** many options depending on material

ONLINE - Product Range Overview

- available formats and measures
- available materials
- available surfaces and colors
- options regarding fire protection



All product options always up to date via QR code scan or via this link → www.trikustik.at/sortiment

Application: Information on planning, processing, installation and care: www.trikustik.at

SOUND ABSORPTION VALUES



Measurement: acc. to DIN EN ISO 354

Data source: certificate by TU Graz

Valid for: application at wall and ceiling

Fleece: SP50 or equivalent

Insulation: Sonorock or equivalent

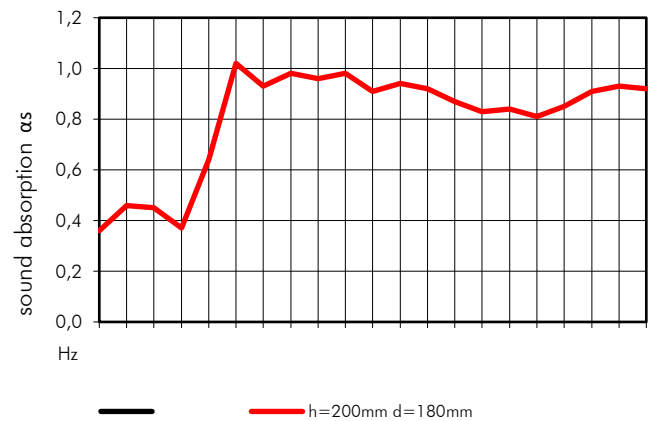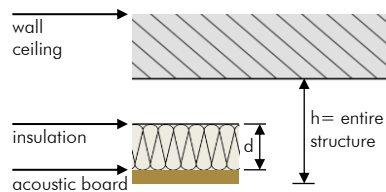

Aufbau	Hz	50	63	80	100	125	160	200	250	315	400	500	630	800	1000	1250	1600	2000	2500	3150	4000	5000	
h=200mm d=180mm	α_s	0,36	0,46	0,45	0,37	0,64	1,02	0,93	0,98	0,96	0,98	0,91	0,94	0,92	0,87	0,83	0,84	0,81	0,85	0,91	0,93	0,92	α_w : 0,90 (L) SAA: 0,90
	α_p		0,40			0,70			0,95			0,95			0,85			0,85			0,90		